

REFRIGERATORS *i* **EQUIPMENT LINE**







Preservus mortuary refrigerators are crafted with a strong emphasis on

Quality Reliability and Durability

Built to meet the highest hygiene standards, they are easy to clean and maintain, ensuring long-term dependability. To accommodate diverse needs, customization options include adjustments to size, surface materials, and the option for multi-cell refrigerators accessible through a single door, providing a practical & efficient solution.

Preservus by Medica-Lab® ensures a Vergatile Solution tailored to suit diverse needs.

NUMBER OF CELLS	DESIGN	WORKING TEMPRATUR	E TEMPR	VATION ATURE (RI IDICATION) (RI	POWER ECOMMENDED)	POWER SUPPLY (STANDARD)
ONE CELL		32°C	REFREGIRATOR +3.5°C (Tolerance +/-1.5°C)	FREEZER -20°C (Tolerance +/-1.5°C)	0.50 Hp	50-60 Hz
TWO CELLS	В	32°C	+3.5°C (Talerance +/-1.5°C)	-20°C (Tolerance +/-1.5°C)	0.75 Hp	50-60 Hz
THREE CELLS	E	32°C	+3.5°C (Tolerance +/-1.5'C)	-20°C (Tolerance +/-1.5°C)	1 Нр	50-60 Hz
FOUR CELLS		32°C	+3.5°C (Tolerance +/-1.5°C)	-20°C (Tolerance +/-1.5°C)	1.5 Hp	50-60 Hz
SIX CELLS		32°C	+3.5°C (Tolerance +/-1.5°C)	-20°C (Tolerance +/-1.5°C)	2 Нр	50-60 Hz
NINE CELLS		32°C	+3.5°C (Tolerance +/-1.5°C)	-20°C (Tolerance +/-1.5°C)	2.75 Нр	50-60 Hz

STANDARD VARIATION (OTHER CUSTOMIZED OPTIONS AVAILABLE ON DEMAND):

Interior light with seperate switch or door contact-switch •

Label holder on doors

Designed for Sternuty

- Backup cooling system
- Customized cell dimensions
- Customized door dimensions •
- Voltage 3 phase 380V/50Hz •

Additional cooling system automatically switched on if failure occurs



REFRIGERATOR OPERATING TEMPERATURE RANGE +2 to +8 °C

PRESERVUS



OPTIONAL Multiple Refrigeration Units



FREEZER OPERATING TEMPERATURE RANGE 0 to -40 °C



INTERIOR & EXTERIOR

Stainless Steel 304

CELL STANDARD INTERNAL DIMENSIONS (MM) - CUSTOMIZED UPON REQUEST -

550 W * 700 H



BODY TRAY Stainless Steel with 2 Handles



DENSITY 40 KG/m³

OPTIONAL Universal Door Locking System OPTIONAL UPS Alarm

C

DOORS

Customized

Upon Request



OPTIONAL Deodorizer




Designed for Stennet

2

OPTIONAL Backup Cooling System

REFRIGERATORS' STANDARD DIMENSIONS

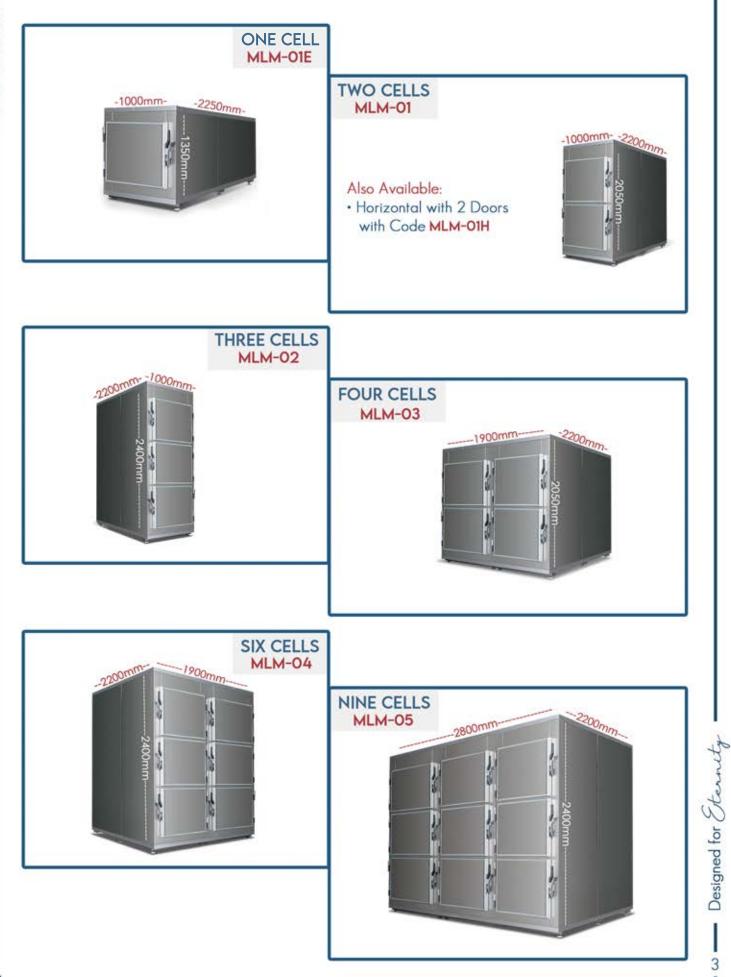

I

ANATOMY TABLE

MLM-11



PRESERVUS

- Top plate is made of Satinless Steel AISI 304
- Stainless steel basin
- Provided with hand mixer
- Optional Accessories:
- Removable stainless steel perforated tray
- Shower head

LIFT TROLLEY





PICTURES FROM PREVIOUS PROJECTS


Length	Width	Height
2200 mm	800 mm	300-1600

- Can be used for transporting bodies
- The mechanism of the hydraulic lifting is operated by a hand or foot pedal
- Maximum load is 250 KG





Designed for Stennet

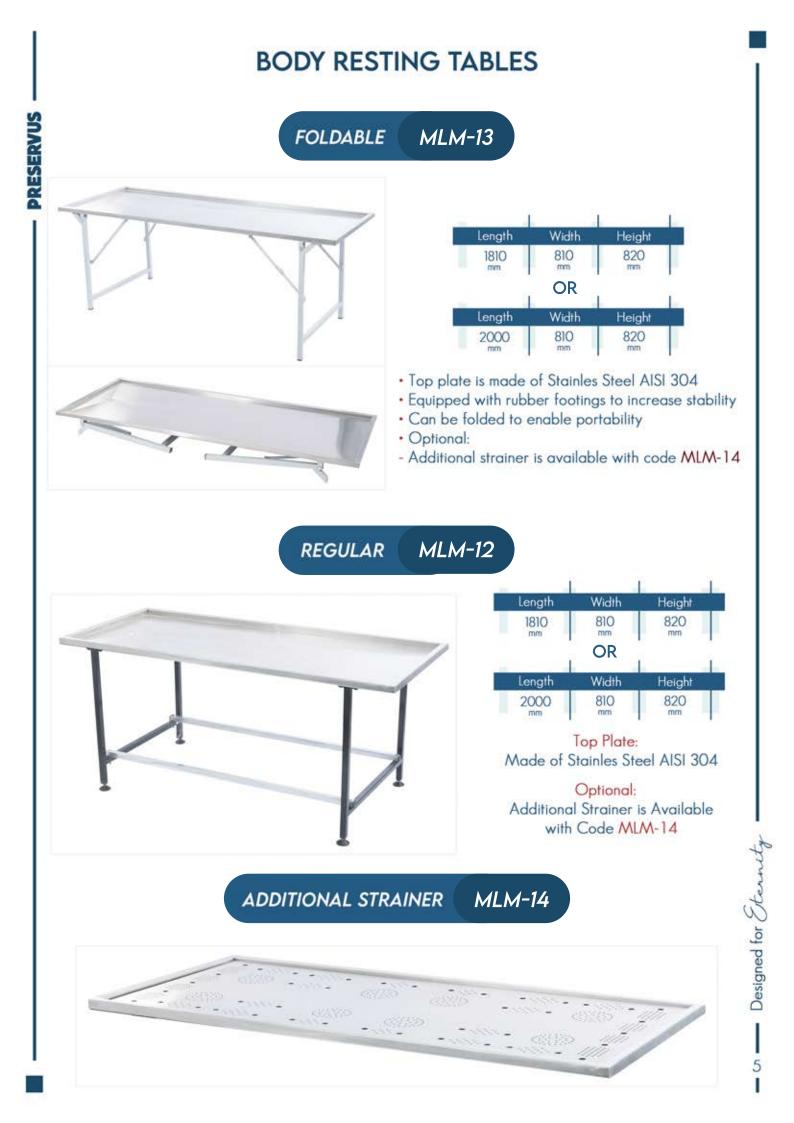

TRANSFER TROLLEY

WITH STAINLESS-STEEL COVER MLM-22







Designed for Sternity











Designed for Sternuty





- 5 - Designed for Sternuty

A GLIMPSE OF OUR INSTALLED PROJECTS

PRESERVUS





Designed for Eternity 11

I







Designed for Sternuty 12

A GLIMPSE OF OUR INSTALLED PROJECTS



Designed for Eternity

13







Designed for Stennet 14 I





15





PRESERVUS

Designed for Sternuty 16







CONTACT US

📞 +966 5806 84623 🌐 www.medica-lab.com 🖂 info@medica-lab.com



Industrial City District, Medina, Saudi Arabia